

**A Health and Safety Guide for
Material Testing Laboratories in the
Road Construction Industry
Manual 38 December 2019**

Published by Sabita
Post Net Suite 56
Private Bag X21
Howard Place 7450
South Africa

ISBN 978-1-874968-78-8

Second Edition: December 2019

DISCLAIMER: While considerable effort has been made to ensure the accuracy and reliability of the information contained in this publication, no warranty, assurance or representation is made in respect of fitness for purpose. Furthermore, neither Sabita nor any of its members can accept liability for any loss, damage or injury whatsoever resulting from the use of this information.

The user of this manual is deemed to have the necessary knowledge, skill and judgment to design bituminous surfacings and to exercise the necessary care and diligence in the application of this knowledge, skill and judgment. The information in this publication cannot supplant the user of the information's knowledge, skill and judgment based on the specific site and material conditions and state of the art and the user's exercise of the necessary care and diligence in the application of this knowledge, skill and judgment. Hence neither Sabita nor any of its members can accept liability for any loss, damage or injury whatsoever from the application, or failure to apply such knowledge, skill and professional judgment with the necessary care and diligence by the user of the information in this publication.

The above exclusions apply irrespective of any references in any COTO document to any of Sabita's manuals.

Copyright Notice: This document and the contents of these pages are the Southern African Bitumen Association (Sabita). This document is made available to Members of Sabita as a service and is intended for the sole use of such Members, who may reproduce this document in whole or in part for the purpose of implementation of the systems described herein. All other rights are reserved. Any other use requires the prior written permission of Sabita.

ACKNOWLEDGEMENTS

SABITA wishes to acknowledge, with thanks, the contributions of the following organisations and individuals in compiling this important guide document for the industry:

Saied Solomons, CEO, SABITA (Project convener and oversight)

Anton Ferreira, SABITA HSE Consultant (Compiler)

Alec Rippenaar, Central Lab Manager, Much Asphalt

Firyaal Moos, Senior Lab Technician, Much Asphalt

Mornè Labuschagne, Technical Manager Bitumen, Much Asphalt Laboratory

Saartjie Duvenhage, ASPASA

LIST OF COMPANION SABITA MANUALS AND DVDs

Manual 1	<i>Technical guidelines: Construction of bitumen rubber seals</i>
Manual 2	<i>Bituminous binders for road construction and maintenance</i>
Manual 3 & 4	<i>(Withdrawn)</i>
Manual 5	<i>Guidelines for the manufacture and construction of hot mix asphalt</i>
Manual 6	<i>(Withdrawn)</i>
Manual 7	<i>SuperSurf – Economic warrants for surfacing roads</i>
Manual 8	<i>Guidelines for the safe and responsible handling of bituminous products</i>
Manual 9	<i>(Withdrawn)</i>
Manual 10	<i>Bituminous surfacing for low volume roads and temporary deviations</i>
Manual 11	<i>Labour enhanced construction for bituminous surfacings (This manual has been withdrawn and consolidated with Manual 12)</i>
Manual 12	<i>Labour Absorptive Methods in Road Construction using Bituminous Materials</i>
Manual 13	<i>LAMBs – The design and use of large aggregate mixes for bases</i>
Manual 14	<i>(Superseded by TG2)</i>
Manual 15 & 16	<i>(Withdrawn)</i>
Manual 17	<i>Porous asphalt mixes: Design and use</i>
Manual 18	<i>Appropriate standards for the use of sand asphalt</i>
Manual 19	<i>Guidelines for the design, manufacture and construction of bitumen rubber asphalt wearing courses (CD)</i>
Manual 20	<i>Sealing of active cracks in road pavements</i>
Manual 21	<i>(Superseded by TG2)</i>
Manual 22	<i>Hot mix paving in adverse weather</i>
Manual 23	<i>Code of practice: Loading bitumen at refineries</i>
Manual 24	<i>User Guide for the Design of Hot Mix Asphalt</i>
Manual 25	<i>Code of practice: Transportation, off-loading and storage of bitumen and bituminous products (CD)</i>
Manual 26	<i>Interim guidelines for primes and stone pre-coating fluids</i>
Manual 27	<i>Guidelines for thin hot mix asphalt wearing courses on residential streets</i>
Manual 28	<i>Best practice for the design and construction of slurry seals</i>
Manual 29	<i>Guide to the safe use of solvents in a bituminous products laboratory</i>
Manual 30	<i>A guide to the selection of bituminous binders for road construction</i>
Manual 31	<i>Guidelines for calibrating a binder distributor to ensure satisfactory performance</i>
Manual 32	<i>Best practice guideline and specification for warm mix asphalt</i>
Manual 33	<i>Design procedure for high modulus asphalt (EME)</i>
Manual 34	<i>(A) Guidelines to the transportation of bitumen and (B) Bitumen spill protocol</i>
Manual 35/TRH8	<i>Design and use of Asphalt in Road Pavements</i>
Manual 36 / TRH21	<i>Use of Reclaimed Asphalt in the Production of Asphalt</i>
Manual 37/TMH5	<i>Sampling Methods for Road Construction Materials</i>
Manual 38	<i>A Health and Safety Guide for Material Testing Labs in the Road Construction Industry</i>
Manual 39	<i>Laboratory Testing Protocols for Binders and Asphalt</i>
Manual 40	<i>Design and Construction of Surfacing Seals</i>

Technical guidelines

TG1	<i>The use of modified binders in road construction</i>
TG2	<i>Bitumen stabilised materials</i>
TG3	<i>Asphalt reinforcement for road condition</i>

DVDs

DVD100	<i>Test methods for bituminous products</i>
DVD200	<i>Training guide for the construction and repair of bituminous surfacings by hand</i>
DVD300	<i>Manufacture, paving and compaction of hot mix asphalt</i>
DVD410	<i>The safe handling of bitumen</i>
DVD420	<i>Treatment of bitumen burns</i>
DVD430	<i>Working safely with bitumen</i>
DVD440	<i>Firefighting in the bituminous products industry</i>
DVD450	<i>Safe loading and off-loading of bitumen</i>

PREFACE

This document has been produced in answer to concerns expressed by Organisations that operate Materials Testing Laboratories in the Road Construction Industry. The concern is that operators of material testing laboratories may not be in full compliance with applicable Health and Safety Legislation and/or that, the arrangements for addressing Health and Safety risk and hazards in the “*workplace*” do not conform to acceptable standards.

SABITA was approached to assist in this regard and hence took the initiative to development this Health and Safety best practice guide for a routine Materials Testing Laboratory, as well as to establish an Industry Laboratory Health and Safety Certification and Awards Scheme. This guide does not include the proposed Certification and Awards Scheme, which will be developed separately and in consultation with Industry role players.

DISCLAIMER

This document is prepared for the sole purpose of making the information contained herein available to operators of Materials Testing Laboratories in the Road Construction Industry. This publication is a reference document to assist with making informed decisions in connection with the Health and Safety requirements associated with the activities of Materials Testing Laboratories as applicable.

Whilst every effort has been made to ensure the accuracy of the information contained in this publication, neither the author or SABITA, nor any of its members past present or future, warrants its accuracy or will, regardless of its or their negligence, assume liability for any foreseeable or unforeseeable use made thereof, which liability is hereby excluded.

Consequently, such use is at the recipient’s own risk on the basis that any use by the recipient constitutes agreement to the terms of this disclaimer. The recipient is obliged to inform any subsequent recipient of such terms.

SCOPE AND OBJECTIVES

The intended audience of this guide is primarily Bituminous and Asphalt Materials Testing laboratories. However, in response to interest shown by other interested parties, the scope has been extended to include laboratories active in the broader Road Construction Industry. The scope therefore covers, but is not limited to, the work processes and associated activities of laboratories that deliver services in the following categories:

1. Bituminous and Asphalt Materials Testing;
2. Aggregate Testing;
3. Soils and Gravel Analysis and Testing;
4. Concrete Analysis and Testing;
5. Rock Testing;
6. Geotechnical Testing;
7. Field investigations.

The primary objectives of this guide are as follows:

- To provide Laboratory Managers with a framework to facilitate a program for establishing a Risk Management Plan, that will ensure a safe and healthy working environment;
- To help the Lab to comply with applicable Laws, Regulations and Local Authority By-laws;
- To facilitate the training of Laboratory personnel;
- To provide a basic inspection *aide memoir* to facilitate inspection of work places where hazardous chemical agents are used.

GLOSSARY OF TERMS AND ABBREVIATIONS

- Acute toxicity** : Adverse health effects occurring within a short time period of exposure to a single dose of a chemical or as a result of multiple exposures over a short time period, e.g. 24 hours.
- Auto ignition** : The auto ignition temperature of a substance is the temperature at or above which a material will spontaneously ignite (catch fire) without an external spark or flame.
- Auto ignition temperature** : The minimum temperature required to initiate or cause self-sustained combustion of material in the absence of any external source of energy. (Values may change significantly with geometry, gas/vapour concentration, and presence of catalyst.) Any ignition source must be at a temperature of, or greater than, the ignition temperature of the specific substance.
- Barrier cream** : A topical compound for limiting or preventing contact with irritants such as allergens, parasites, or toxins.
- BLEVE** : Boiling Liquid Expanding Vapour Explosion. Instantaneous release and ignition of flammable vapour upon rupture of a vessel containing flammable liquid above its atmospheric boiling point.
- Boil-over** : The rapid increase in volume caused by the presence of water in hot bitumen and the subsequent overflow from a container.
- Carcinogen** : Any agent or mixture which induces cancer or increases its incidence, classified by GHS as:
(a) Category 1: known or presumed human carcinogens;
(b) Category 2: suspected human carcinogens
- CEO** : Chief Executive Officer - in relation to a body corporate or an enterprise conducted by the State, means the person who is responsible for the overall management and control of the business of such body corporate or enterprise;
- Chronic toxicity** : Adverse health effects resulting from repeated daily exposures to a chemical for a significant period.
- Contact dermatitis** : Inflammation of the skin due to exposure to a substance that attacks its surface.
- Combustible** : A combustible material is a solid or liquid than can be easily ignited and burned.
- Corrosive** : A substance that chemically attacks a material with which it has contact (body cells, materials of construction).
- Due diligence** : Applied to occupational health and safety, due diligence means that “employers” shall take all reasonable precautions, under the particular circumstances, to prevent injuries or incidents in the “workplace”.
- Employer** : Employer as defined in the OHSA means any person, institution or organisation, including government who employs and provides work to an employee, and supervises, remunerates or tacitly or expressly undertakes to remunerate such employee for services rendered by such employee.

Ergonomics	: A scientific discipline concerned with the fundamental understanding of interactions among humans and other elements of a system, and the profession that applies theory, principles, data and methods to design in order to optimise human well-being and overall system performance
Exothermic reaction	: A chemical reaction in which heat is released and, unless temperature is controlled, may lead to runaway conditions.
Flammable liquid	: “Flammable liquid” means any liquid which produces a vapour that forms an explosive mixture with air, and includes any liquid with a closed-cup flash-point of less than 55° C.
Flammable limits/range	: A flammable vapour mixed with air will only ignite/explode if the mixture is in the flammable range. The minimum and maximum percentage gas concentrations, which can be ignited, constitute the lower and upper limits respectively. The flammable limits and the flammable range are also known as the Explosive Limits and the Explosive Range respectively.
Flash point	: The lowest temperature required to raise the vapour pressure of a liquid such that vapour concentration in air near the surface of the liquid is within the flammable range, and as such the air/vapour mixture will ignite in the presence of a suitable ignition source, usually a flame.
Fume	: Airborne solid particles (usually <0.1µm) that have condensed from the vapour state.
GHS	: The Globally Harmonized System of classification and labelling of chemicals, a guidance document developed by the United Nations for standardizing and harmonizing the classification and labelling of chemicals globally, as may be updated from time to time, commonly known as the UN Purple Book.
Hazard	: The inherent property of a substance capable of causing harm (e.g. toxicity, radioactivity, flammability, explosivity, reactivity, instability). In a broader context anything that can cause harm, e.g. electricity, oxygen-deficiency, machinery, extreme temperature.
HCSR	: Hazardous Chemical Substances Regulations made under the OHSA
Hazardous waste	: Any waste that contains organic or inorganic elements or compounds that may, owing to the inherent physical, chemical or toxicological characteristics of that waste, have a detrimental impact on health and the environment.
HRA	: Health Risk Assessment as contemplated in the Hazardous Chemical Substances regulations
Ionizing radiation	: The transfer of energy in the form of particles or electromagnetic waves of a wavelength of 100 nanometres or less or a frequency of 3×10^{15} hertz or more capable of producing ions directly or indirectly.
LEL/LFL	: Lower (Explosive or Flammable) Limit. The minimum concentration of a gas, vapour, mist or dust in air at a given pressure and temperature that will propagate a flame when exposed to an efficient ignition source. Generally expressed as % by volume for gases and vapours, and as mg/m ³ for mists or dusts.

- LPG** : Liquefied Petroleum Gas. Petroleum gas stored or processed as a liquid in equilibrium with vapour by refrigeration or pressurization. The two LPG's in general use are propane and butane.
- OEL** : Occupational Exposure Limit. A limit value set by the Minister for a stress factor in the workplace as revised from time to time by notice in the Government Gazette.
- OEL-CL** : Occupational Exposure Limit - Control Limit. The occupational exposure limit for a hazardous chemical substance as listed in Table 1 of Annexure 1 [of HCSR] and "control limit" has a corresponding meaning.
- OEL-RL** : Occupational Exposure Limit-Recommended Limit. The occupational exposure limit for a hazardous chemical substance as listed in Table 2 of Annexure 1 [of HCSR] and "recommended limit" has a corresponding meaning.
- OHSA** : Occupational Health and Safety Act, as amended.
- Oxidizing agent** : Compound that gives up oxygen easily or removes hydrogen from another compound. It may comprise a gas, e.g. oxygen, chlorine, fluorine, or a chemical which releases oxygen, e.g. a nitrate or perchlorate. A compound that attracts electrons.
- Percutaneous absorption** : Absorption via the skin, e.g. due to local contamination or a splash of chemical.
- Pyrophoric substance** : A material that undergoes such vigorous oxidation or hydrolysis (often with evolution of highly-flammable gases) when exposed to atmospheric oxygen or to water, that it rapidly ignites without an external source of ignition. This is a special case of spontaneous combustion.
- Reasonably practicable** : Practicable having regard to-
- (a) the severity and scope of the hazard or risk concerned;
 - (b) the state of knowledge reasonably available concerning that hazard or risk and of any means of removing or mitigating that hazard or risk;
 - (c) the availability and suitability of means to remove or mitigate that hazard or risk; and
 - (d) the cost of removing or mitigating that hazard or risk in relation to the benefits deriving therefrom;
- Risk** : Risk means the probability [Likelihood] that personal injury, illness or the death of an employee or any other person or damage to property will occur.
- Risk Assessment** : The process of evaluating the risks to an employee's health and safety from workplace hazards and is a systematic assessment of all aspects of work that considers:
- (a) a complete hazard identification;
 - (b) identification of all who may be affected by the hazard;
 - (c) how the person is affected;
 - (d) the analysis and evaluation of the hazards; and
 - (e) prioritisation of risks;

SABITA	: Southern African Bitumen Association
SDS	: Safety Data Sheet/s. Safety Data Sheets are an essential component of the GHS and are intended to provide comprehensive information about a substance or mixture for use in workplace chemical management.
Solvents	: Liquids that dissolve other substances. Chemical solvents are used widely in industry: e.g. by pharmaceutical makers to extract active substances; by electronics manufacturers to wash circuit boards; by paint makers to aid drying.
Source of ignition	: Naked light, fires, exposed incandescent materials, electric welding arcs, lamps not of the approved pattern, sparks and flames produced by other means. They all provide temperatures in excess of the ignition temperature.
Substance	: Includes any solid, liquid, vapour, gas or aerosol, or combination thereof.
Volatility	: The tendency and ability of a substance to vaporise at normal ambient temperature. Volatile hydrocarbons are usually in the low boiling point substance range.
Volatile solvents	: Volatile solvents are liquids that vaporise at room temperature. These organic solvents can be inhaled for psychoactive effects and are present in many domestic and industrial products such as glue, aerosol, paints, industrial solvents, lacquer thinners, gasoline, and cleaning fluids.
Workplace	: Workplace means any premises or place where a person performs work in the course of employment.
UEL	: Upper Explosive or Flammable Limit. The maximum concentration of gas, vapour, mist or dust in air at a given pressure and temperature in which a flame can be propagated.

CONTENTS

1. INTRODUCTION	10
2. REGULATORY REQUIREMENTS	10
3. CONTROL FRAMEWORK FOR LABORATORY HEALTH AND SAFETY	11
3.1 Suggested Framework	11
Figure 1 - Suggested Lab HSE Control Framework	11
3.1.1 Health and Safety Policy and Commitment	11
3.1.2 Health and Safety Standards	12
3.1.3 Workplace Specific Risk Management Plan	12
3.1.3.1 Risk Assessment and Hazard Analysis Process	12
3.2 Considerations for Developing Controls	13
Figure 2 - The Hierarchy of Controls	13
3.3 Hazard Communication	14
3.4 Monitoring, Reporting and Corrective Action	14
4. GENERAL CONSIDERATIONS FOR CONTROL OF LABORATORY HAZARDS	15
4.1 Regulatory requirements	15
Table 1 - Regulatory scope, reference and key requirements	15
4.2. Generic best practice guidance for controlling chemical hazards in the Lab	17
Figure 3 - GHS Pictograms for packaging and labelling	18
4.3 The importance of good housekeeping in the Lab	20
4.4 Compressed Gases	21
4.5 Guidance on providing appropriate and suitable PPE	22
5. MATERIALS TESTING LABORATORY SPECIFIC HAZARDS	23
Table 2 - Examples of typical Hazards, Potential Consequences and Recommended Control Measures	24
REFERENCES	28
Annexure 1 - Example Lab HSE Policy	29
Annexure 2 - Example Qualitative Risk Assessment Matrix	30
Annexure 3 - Example Hazard Register	31
Annexure 4 - Example Hazard Control Sheet	32

1. INTRODUCTION

The concept of “Due Diligence” is a generally accepted Business Principle, although its practical application is not always well understood. Exercising Due Diligence could prevent liability under the Occupational Health and Safety Act and is a defence available to companies or individuals charged under the Occupational Health and Safety Act.

To be able to prove due diligence, an accused (employer) must be able to prove that they took all reasonable precautions to prevent an incident from occurring. In practical terms and in the context of the Occupational Health and Safety Act, cognisance must be taken of the definition of **“Reasonably Practicable”**, a term which is used extensively throughout the Act and Regulations. In order to prove Due Diligence an **“employer”** must be able to demonstrate that **as far as is reasonably practicable**, a working environment that is safe and without risk to the health of his or her employees is provided and maintained.

Considering the above, and in particular the meaning of **“Reasonably Practicable”**, it is a reasonable assumption that Due Diligence means, that merely complying with Legislative requirements, IS NOT always adequate to provide and maintain a working environment that is safe and without risk. Cognisance must be taken of best practice information and guidance, available and reasonably accessible, in connection with relevant Health and Safety risks and hazards in the workplace.

This guide therefore recommends, over and above minimum arrangements for legal compliance, relevant best practice guidance to assist employers with demonstrating Due Diligence.

2. REGULATORY REQUIREMENTS

The principle piece of Legislation that governs Health and Safety in the workplace is The Occupational Health and Safety Act (Act No. 85 of 1993) as amended. It is a requirement that a copy of the Act shall be readily available at the workplace.

Administrative Regulation 4. ‘Every employer with five or more persons in his employ shall have a copy of the Act and the relevant regulations readily available at the work place: Provided that, where the total number of employees is less than five, the employer shall, on request of an employee, make a copy of the Act available to that employee.’

Also, a number of Regulations made under the Act, could be applicable to your operations. The various Acts and Regulations are freely available and can be downloaded from the relevant Government websites and specifically the Department of Employment and Labour at the following link <http://www.labour.gov.za/documentcenter>.

The general requirements of the Act (*or any other relevant Act*) and relevant Regulations will not be discussed in any detail in this guide however, specific sections from the Act and/or applicable Regulations will be referenced, and if necessary, briefly discussed later to inform on the minimum expectations to comply with relevant regulatory requirements.

3. CONTROL FRAMEWORK FOR LABORATORY HEALTH AND SAFETY

3.1 Suggested Framework

It is not the intention to discuss a comprehensive Environment, Health and Safety Management System in this guide. Ideally an organisation should consider establishing a System based on an internationally recognised standard such as SANS 18001 or ISO 4500.

However, it is recognised that not all organisations have the resources, especially the financial means, to implement and maintain such systems. Therefore, the suggested control framework in Figure 1 below is proposed as a bare minimum to assist laboratories to demonstrate HSE Due Diligence. The suggested framework will ensure legal compliance and also includes best practice for Hazard Analysis and Hazard Control.



Figure 1 - Suggested Lab HSE Control Framework

3.1.1 Health and Safety Policy and Commitment

A Health and Safety Policy is not mandatory in accordance with the OHSA, unless the Chief Inspector directs an employer in writing to prepare a written policy concerning the protection of the health and safety of his employees at work. However, it is considered best practice for organisations to prepare and display a written HSE Policy. The purpose of the policy is to express the employer's commitment to health and safety. It should include a statement regarding the responsibilities of the employer, supervisors and other workers. A policy broadly states what the employer intends to do about commitment and support for health and safety in the workplace. An example of an HSE Policy is appended to this guide as Annexure 1.

3.1.2 Health and Safety Standards

Standards are designed to ensure that HSE systems and control measures are adequate, reliable and consistently perform the way they are intended to. The OHSA and other relevant Acts and Regulations encompass the minimum workplace HSE Standards.

In addition, other standards adopted by organisations enhance the HSE management efforts and establish common values that define safety and quality requirements. In the laboratory HSE control framework the Health and Safety Standards provide the basis for consistent application of processes and procedures necessary to assure the quality of the Risk Management Plan. It is recommended that, at a minimum, laboratory management should consider developing workplace specific written standards that include, but are not limited to the following:

- » Hazard Identification and Risk Assessment (Examples are - A generic list of Hazards that could be inherent to the workplace activities and tasks; A Risk Assessment Matrix to classify and prioritise risk);
- » A best practice Hazard Analysis technique (Example - The BowTie Methodology);
- » A standard for Incident Notification, Investigation, Reporting and Follow-up;
- » An HSE Communication standard;
- » An Energy Isolation standard;
- » A standard for Storage and Handling of Hazardous Substances;
- » An HSE Audit Plan.

3.1.3 Workplace Specific Risk Management Plan

It should be noted here that the OHSA is under revision and the Occupational Health and Safety Amendment Bill is expected to be published soon for public comment. The Bill proposes some significant changes with regard to the process to be followed for **Risk Assessment** and also provides for a mandatory **Risk Management Plan** to be established. Although it is expected that the current proposed change in this regard will likely be enacted as is, it would be highly presumptuous to assume this.

However, regardless of the ultimate provisions of the Amended Act, the elements of the Risk Management Plan recommended in this guide are considered to be best practice and include some of the proposed changes to the Act.

3.1.3.1 Risk Assessment and Hazard Analysis Process

It is important to note that the Act is very explicit in stating that the Risk Assessment SHALL BE WORKPLACE SPECIFIC. A workplace specific risk assessment is a process of assessing risk of all aspects of work, and a systematic analysis of workplace hazards, that considers:

- a) A complete hazard identification (HAZID);
- b) Identification of all who may be affected by the hazard;
- c) How the person/s may be affected (Consequences); and
- d) The assessment, evaluation and classification of the risks (LOW, MEDIUM, HIGH).

Once a risk assessment is completed the systematic analysis of the identified hazard/s is performed using a methodology such as BowTie, or a similar technique, including the following steps:

- i. Clearly define/describe the HAZARD;
- ii. Determine the TOP EVENT (initiating event) that could release the HAZARD;
- iii. Determine the potential CONSEQUENCES of the TOP EVENT (who/what may be affected);
- iv. Determine the potential THREATS (causes) that could lead to the TOP EVENT;
- v. Develop BARRIERS (controls) for each THREAT. BARRIERS are aimed at *preventing* the TOP EVENT;
- vi. Develop controls to mitigate the CONSEQUENCES (*recovery measures*);
- vii. Document the results of the analysis in a Hazard Register.

3.2 Considerations for Developing Controls

OHSA Section 8. 2. (b) clearly states that the duties of an employer to employees include “*taking such steps as may be reasonably practicable to eliminate or mitigate any hazard or potential hazard to the safety or health of employees, **before resorting to personal protective equipment***”.

In practice it is a generally accepted rule that the Hierarchy of Controls is applied when developing controls for workplace hazards. Figure 2 below shows the steps in the Hierarchy of Controls.

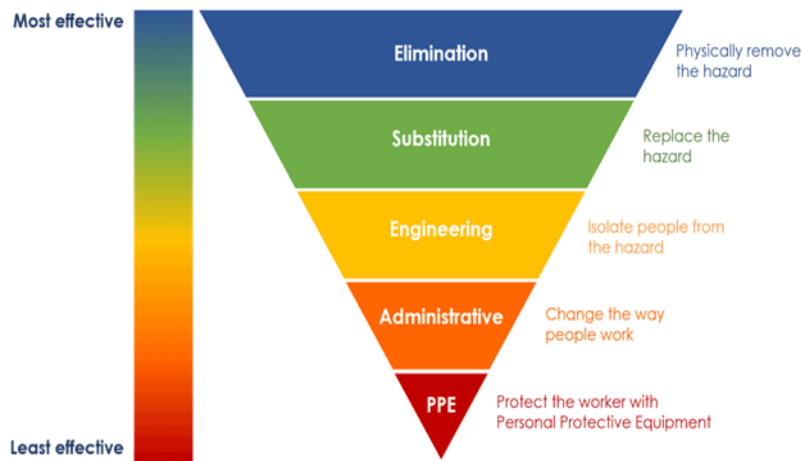


Figure 2 - The Hierarchy of Controls

Risks should be reduced to the lowest reasonably practicable level by implementing preventative measures, in order of priority. This is what is meant by a hierarchy of control. The list below sets out the order to follow when developing controls for the hazards you have identified in your workplace. Consider the headings in the order shown - DO NOT simply jump to the easiest control measure to implement: -

- i. **Elimination** - Redesign the job or substitute a substance so that the hazard is removed or eliminated;
- ii. **Substitution** - Replace the material or process with such as will reduce the severity of the hazard;
- iii. **Engineering controls** - Enclosure, Isolation, Ventilation. For example:
 - » Enclosure - Machine guarding prevents workers from coming into contact with dangerous parts of machines;
 - » Isolation - Move a hazardous job to a part of the workplace where fewer people will be exposed;
 - » Ventilation - Local exhaust ventilation to remove hazardous airborne contaminants such as dusts, gases, vapours and fumes, etc., and General ventilation for keeping the workplace comfortable.
- iv. **Administrative controls** - These are all about identifying and implementing the procedures needed to work safely. For example:
 - » Limited time exposure to hazards;
 - » Written operating procedures;
 - » Health and Safety rules for employees;
 - » Alarms, Safety Signs, Warning systems, etc;
 - » Health and Safety Training.
- v. **Personal protective clothes and equipment** - Only after all the previous measures have been tried and found ineffective in controlling risks to a reasonably practicable level, must personal protective equipment (PPE) be used.

For example:

- » Where you cannot eliminate the risk of a fall, use fall arrest equipment to minimise the distance and consequences of a fall (should one occur);
- » Where exposure to physical agents cannot be reduced to an acceptable level, use items of clothing such as heat and chemical resistant gloves, aprons, eye and face protection and, suitable respiratory and hearing protection equipment, etc.

3.3 Hazard Communication

Hazard communication in the workplace is a vitally important process and the OHSA clearly places a duty on the employer to ensure effective communication in Section 8. (General duties of employers to their employees) and Section 13. - (Duty to inform). The arrangements for Hazard Communication should be documented in the laboratory HSE Communication Standard. Typical documentation and processes to comply with the minimum requirements include, but are not limited to:

- » The Hazard Register;
- » Hazard Control Sheets;
- » Standard Operating Procedures and Task Instructions (Included here are the manufacturer's operating instructions. ***Steps should be taken to ensure that these are clearly understood to ensure that the proper operating and safety procedures outlined in the owner's manual supplied with the equipment or apparatus are carried out. These are legally binding documents and the precautionary measures prescribed therein must be adhered to***)
- » Employee HSE Induction and task specific HSE Training Programs;
- » HSE Tool Box Talks;
- » Symbolic Safety Signs and Chemical Hazards Pictograms as required by the GHS;
- » Safety Data Sheets in the prescribed GHS format **MUST** be readily available;
- » Arrangements for communicating with HSE Representatives;
- » HSE Committee minutes;
- » Inspection/Audit Reports, etc.

A selection of some best practice examples for elements of the Risk Management Plan, are appended to this guide:

- » An example of a qualitative Risk Assessment Matrix - Annexure 2;
- » A Hazard Register - Annexure 3;
- » A Hazard Control Sheet - Annexure 4;

3.4 Monitoring, Reporting and Corrective Action

OHSA Section 8. (1) and (2) (a) states that an employer "shall provide and maintain" systems of work that are safe and without risk to the health of employees. This clearly means that an employer shall cause the safe systems of work to continue working as intended. This cannot happen if the implementation of the Risk Management Plan is not monitored, and regularly reviewed to ensure conformance with standards.

Regular laboratory HSE Inspections, periodic Audits and Management review of the Risk Management Plan must be performed. It is recommended that a laboratory HSE Audit Plan is developed, implemented and that the plan execution is closely monitored by management. Besides regular workplace inspections and periodic Internal Audits it is recommended that a comprehensive management review of the Risk Management Plan be conducted at least once per year to ensure continued suitability of the plan.

4. GENERAL CONSIDERATIONS FOR CONTROL OF LABORATORY HAZARDS

4.1 Regulatory requirements

Regulatory requirements establish the MINIMUM STANDARDS for workplace Health, Safety and Environmental management and conformance with these requirements will provide a solid foundation to build on in pursuit of continuous improvement. Some of the most important regulatory requirements that are applicable, but not limited, to the activities of a typical Materials Testing Laboratory are as follows:

Table 1 - Regulatory scope, reference and key requirements

Regulatory scope	Regulatory Reference	Key Requirements
General workplace HSE administration	General Administrative Regulations, 2003;	<ul style="list-style-type: none"> • Copy of the Act must be available • Health and safety committee meeting minutes to be kept for at least 3 years • Arrangements for selection and designation of HSE Representatives • Reporting of incidents and occupational diseases and recording and investigation of incidents
Hygiene and ventilation of facilities provided for employees in the workplace	Facilities Regulations, 1988; Parts F, O, P and Q of the National Building Regulations;	Provision and maintenance of: <ul style="list-style-type: none"> • Sanitation • Personal facilities for safekeeping • Change-rooms (where prescribed) • Dining-rooms (where prescribed) • An adequate supply of drinking water
Control of the physical environment in workplaces	Environmental Regulations for Workplaces, 1987	<ul style="list-style-type: none"> • Thermal requirements • Lighting • Windows • Ventilation • Housekeeping • Precautions against flooding • Fire precautions and means of egress
Exposure of persons to Hazardous Chemical Substances (HCS) at the workplace.	Hazardous Chemical Substances Regulations, 1995 <i>(Note: The HCS regulations will soon be replaced by the Regulations for Hazardous Chemical Agents which are currently in draft)</i>	<ul style="list-style-type: none"> • Information and training • Duties of persons who may be exposed to HCS • Assessment of potential exposure • Air monitoring • Medical surveillance • Respirator zone demarcation • Record keeping • Making Safety Data Sheets available • Control of exposure to HCS • Personal protective equipment and facilities • Maintenance of control measures • Prohibition of certain acts by employees • Labelling, packaging, transportation and storage • Disposal of HCS • Occupational exposure limits (OEL) for HCS in the workplace

Regulatory scope	Regulatory Reference	Key Requirements
Exposure of any person at the workplace to noise at or above the noise-rating limit.	Noise-induced Hearing Loss Regulations, 2003	<ul style="list-style-type: none"> • Information and training • Duties of persons who may be exposed to noise • Assessment of potential noise exposure • Noise monitoring • Medical surveillance • Noise zone demarcation • Control of noise exposure • Record keeping • Hearing protective equipment • Maintenance of control measures
Operation of certain machinery used in a lab.	Driven Machinery Regulations, 2015	<ul style="list-style-type: none"> • Guarding of moving or revolving components of machinery • Operation of circular saws • Safeguards for mixing, agitating and similar machines • Washing machines, centrifugal extractors, etc.
Safety, safe use and maintenance of electrical installations	Electrical Installation Regulations, 2009	<ul style="list-style-type: none"> • Responsibility for electrical installations • Certificate of compliance for electrical installations
Safety in connection with electrical machinery used in the workplace	Electrical Machinery Regulations, 2011	<ul style="list-style-type: none"> • Personal protective equipment • Work on disconnected electrical machinery • Electrical control gear • Switchboards • Electrical machinery in hazardous locations • Portable electric tools • Portable electric lights
Operation, repair, modification, maintenance, inspection and testing of pressure equipment used in the Lab	Pressure Equipment Regulations, 2009	<ul style="list-style-type: none"> • Duties of users • Pressure equipment marking • Pressure and safety accessories • Inspection and test • Records • Access • Gas reticulation equipment and systems • Transportable gas containers • Fire extinguishers
Requirements for various activities that could be performed, or conditions that could prevail in a Materials Testing Lab	General Safety Regulations, 1986	<ul style="list-style-type: none"> • Personal safety equipment and facilities • Intoxication • Display of substituted notices and signs • Admittance of persons • First aid, emergency equipment and procedures • Use and storage of flammable liquids • Work in elevated positions • Stacking of articles • Use of ladders • Minimum contents of a First Aid Box

Regulatory scope	Regulatory Reference	Key Requirements
General requirements in connection with the use of machinery	General Machinery Regulations, 1988	<ul style="list-style-type: none"> • Safeguarding of Machinery • Operation of Machinery • Working on Moving or Electrically Alive Machinery • Devices to Start and Stop Machinery • Reporting of Incidents in Connection with Machinery
Management of hazardous waste generated in a Materials Testing Lab	National Environmental Management: Waste Act, 2008 - Waste Classification and Management Regulations, 2013	<ul style="list-style-type: none"> • Waste Classification • Safety Data Sheets • General waste management requirements • Waste treatment • Waste Disposal to Landfill • Records of waste generation and management • Waste Manifest System
Ergonomics in a Materials Testing Lab	Draft Ergonomics Regulations, 2017	The DOL have published draft Ergonomics regulations for public comment and at the time of writing this guide it was not yet clear what the final content will be or when the Regulations would take effect.

4.2. Generic best practice guidance for controlling chemical hazards in the Lab

4.2.1 Hazard communication for chemicals used in the laboratory (*i.e. fostering a grasp of the characteristics of the chemicals in use*)

Laboratory personnel who handle chemicals should be familiar with the general characteristics, use and storage guidelines, PPE requirements, and health hazards associated with the chemicals they work with on a routine basis. Laboratory management must ensure that on- the-job training is conducted on specific tasks involving the use of chemicals. An important part of the training curriculum shall be knowledge and understanding of the labels that should be fixed to chemical containers.

Most laboratory chemicals will fall within one of the following groups or categories:

- Flammables and Explosives
- Oxidizers
- Corrosives
- Reactive
- Toxins
- Compressed Gas

In general, chemicals within these categories will react similarly and will have similar properties. Of course, many chemicals can fit into more than one category and in this case a decision would have to be made as to what is the most significant characteristic of that chemical.

NOTE ON CHANGES IN PACKAGING AND LABELLING REQUIREMENTS:

One of the objectives of the Draft Regulations for Hazardous Chemical Agents is to align the requirements with the Globally Harmonized System of Classification and Labelling of Chemicals (GHS). A copy of the GHS can be downloaded at the following link:

http://www.unece.org/fileadmin/DAM/trans/danger/publi/ghs/ghs_rev07/English/ST_SG_AC10_30_Rev7e.pdf

A significant change in requirements is that the symbols on labels have changed and the new labels will replace ALL previous labels. It is also recommended that, where possible, the symbols should be inserted in the relevant sections of an SDS. See Figure 3 below for the GHS Pictograms and Hazard Classes.








GHS Pictograms and Hazard Classes		
 <ul style="list-style-type: none"> • Oxidizers 	 <ul style="list-style-type: none"> • Flammables • Self reactives • Pyrophorics • Self-Heating • Emits flammable gas • Organic peroxides 	 <ul style="list-style-type: none"> • Explosives (Divisions 1.1 to 1.4 only) • Self reactives • Organic peroxides
 <ul style="list-style-type: none"> • Acute toxicity (severe) 	 <ul style="list-style-type: none"> • Corrosive to metals • Skin corrosion • Serious eye damage/eye irritation 	 <ul style="list-style-type: none"> • Gases under pressure
 <ul style="list-style-type: none"> • Carcinogen • Respiratory sensitizer • Reproductive toxicity • Target Organ toxicity • Mutagenicity • Aspiration toxicity 	 <ul style="list-style-type: none"> • Aquatic Toxicity (acute) • Aquatic Toxicity (chronic) • Hazardous to the ozone layer 	 <ul style="list-style-type: none"> • Irritant • Dermal sensitizer • Acute toxicity (harmful)

Figure 3 - GHS Pictograms for packaging and labelling

4.2.2 General Chemical Storage Requirements and Guidelines

- Ensure all containers of hazardous chemicals are properly labelled with the identity of the hazardous chemical(s) and appropriate hazard warnings;
- All chemicals should be dated upon receipt in the lab and on opening;
- All chemicals should be stored according to their hazard class and not in strict alphabetical order (*Storing chemicals in alphabetical order will often result in incompatible chemicals being stored next to one another. Check the container labelling or the relevant product SDS if you are not sure of the hazard class*);
- Chemicals should be stored no higher than eye level and never on the top shelf of a storage unit. Shelves should not be overstocked and each shelf should have an anti-roll lip;
- Liquids should be stored in unbreakable or double-contained packaging, or the storage cabinet should have the capacity to hold the contents if the container breaks;
- Flammable liquids should be stored in an approved, dedicated flammable liquid storage cabinet or flammable liquid store if the volume exceeds 40 l of Class 1 (flash point of < 37° C)

and 200 l of class II and III liquids (flash point > 37° C). **(Consult with the local authority (Fire Department) in your area for flammable liquid storage requirements);**

- Store acids in a dedicated acid cabinet. Nitric acid may be stored in the same cabinet but only if it is kept isolated from all other acids;
- Do not store chemicals near heat sources such as ovens, Bunsen burners or steam pipes. Also, do not store chemicals in direct sunlight;
- Do not use lab benches as permanent storage for chemicals;
- All chemicals must be clearly labelled. Inspect your chemicals routinely for any signs of deterioration and for the integrity of the label;
- Do not store chemicals on the floor, especially chemicals in glass containers;
- Do not use fume hoods as a permanent storage location for chemicals, with the exception of particularly odorous or volatile chemicals that may require ventilation;
- Do not store excessive amounts of chemicals in a laboratory. *(Buying chemicals in bulk quantities has more disadvantages than advantages: limited work space, creation of a serious fire hazard, and disposal costs of unused chemicals that are often higher than the initial purchase costs);*
- First aid supplies, emergency phone numbers, eyewash and emergency shower equipment, fire extinguishers, spill clean-up supplies and personal protective equipment should be readily available and personnel trained in their use;
- Only compressed gas cylinders that are in use and secured in place shall be kept in the laboratory. All others, including empties, shall be kept at the compressed gas cylinder storage area for the Lab;
- Be on the look-out for unusual conditions in chemical storage areas, such as:
 - *Improper storage of chemicals*
 - *Leaking or deteriorating containers*
 - *Spilled chemicals*
 - *Temperature extremes (too hot or cold in storage area)*
 - *Lack of or low lighting levels*
 - *Blocked exits or aisles*
 - *Trash accumulation*
 - *Fire equipment blocked, broken or missing*
 - *Lack of information or warning signs ("Flammable liquids", "Acids", "Corrosives", "Poisons", etc.)*

4.2.3 Safe disposal of hazardous chemicals waste

What is Hazardous Waste?

Hazardous waste is a waste that contains organic or inorganic elements or compounds that may, owing to the inherent physical, chemical or toxicological properties of that waste, have a detrimental impact on health or the environment.

General disposal guidelines

- Hazardous chemicals **MUST NEVER** be poured down the drain;
- Generally, ensure that all hazardous chemical waste is classified as waste and disposed of in accordance with the National Environmental Management: Waste Act, no 59 of 2008 and the Waste classification and management regulations, 2013 *(It is recommended that the laboratory management establish a Waste Disposal Procedure and ensure that the requirements are adhered to);*

- It is very important that hazardous waste is segregated into the proper categories. Different hazardous wastes have different disposal methods. Segregate waste wherever possible. Avoid mixing within, as well as, between categories. As a guide the four characteristics **Flammability, Corrosivity, Reactivity, and Toxicity should be considered** to segregate hazardous waste for disposal.
- All waste must be appropriately labelled and packaged for the particular waste category. For example: Corrosive waste should be placed in non-metallic containers and liquid waste must be placed in leak-proof containers with a screw-top or other type of secure lid;
- A specific storage area must be allocated for temporary storage of hazardous waste with strictly controlled access to this area;
- Accumulation of large quantities of hazardous waste in the laboratory should be avoided. Hence waste must be regularly removed for disposal at an approved waste disposal facility;
- It is highly recommended that a reputable waste management organisation is used to collect and dispose of hazardous waste. A certificate of safe disposal, at an approved waste disposal site, should be obtained.

4.3 The importance of good housekeeping in the Lab

The great Mr. Henry Ford was once asked the question:

"What would you do if you were called upon to take charge of a business that had failed?"

His quick answer was:

"No business I know of ever went to the wall without first accumulating a vast pile of dirt. The dirt and all that goes with it, untidy thinking and methods, helped to cause that failure. The first thing I would do would be to clean that business up."

What does good housekeeping mean?

According to Harry Mayer's "First Law of Good Work" it is all about order in the workplace and he cites the following definition of order:

A PLACE IS IN ORDER WHEN THERE ARE NO UNNECESSARY THINGS ABOUT, AND WHEN ALL NECESSARY THINGS ARE IN THEIR PROPER PLACES. "NO" IN THIS SENTENCE MEANS NONE!! NOT ANY!! NOT - EVEN - ONE.

Good housekeeping practices have numerous positive benefits, such as:

- Clean, clutter-free and spill-free work areas;
- Decreased fire hazards;
- Awareness for tripping and related hazards;
- Proper waste management and control of hazardous substances;
- Better hygienic conditions leading to improved health;
- More effective use of space and improved employee morale;
- Improved productivity and better control over what can go wrong.

Basic housekeeping rules for a Laboratory

It is recommended that a Laboratory Housekeeping Checklist be used as a prompt for regular inspections of workplaces. Such checklist could include the following items:

General directives:

- Organise bench tops with large equipment at the back and progressively smaller equipment toward the front. Leave sufficient space to perform your work safely and to avoid reaching over items that can easily get knocked over, such as graduated cylinders or flasks.
- Put away any clean glassware that is not being used. Avoid accumulating large amounts of dirty dishes on lab benches and by sinks. Clean them when your experiment is done. Never leave glassware in the sink because it can easily break.

- Regularly check glassware for star cracks, chips, or cracks, and promptly discard or repair any unsafe glassware.
- Discard disposable pipets and pipette tips immediately after use.
- Properly secure and label all containers of chemicals/experimental intermediates.
- Keep drawers and cabinets closed when not in use.
- Promptly clean up spilled chemicals, silica gel, and any other powdered materials to eliminate respiratory hazards.
- Remove any equipment or clutter that interferes with access to emergency equipment such as eyewash stations, safety showers, and fire extinguishers.
- Floors should be free of hazards. Never leave carelessly discarded objects, dropped objects, or spilled material on the floor.
- Always keep tables, chemical hoods, floors, aisles, and desks clear of all material not being used
- There should always be two clear passageways to exits.
- There should always be clear space around safety showers or eyewashes, fire extinguishers, and electrical controls.
- Sink traps and floor drain traps should be filled with water at all times to prevent the escape of sewer gases into the laboratories.
- Keep any frequently used bench apparatus well away (at least 50 mm) from any edges and secured whenever possible.
- Clean work areas upon completion of an experiment or at the end of each day.
- Keep bench tops and bench liners free of visible contamination.
- Reduce the risk of slips, trips, and falls by cleaning up liquid or solid spills immediately, keeping doors and drawers closed and passageways clear of obstructions.

Storage:

- Sharp or pointed tools should be properly sheathed or stored.
- Clothing should be hung in proper locations and not draped over equipment or benches.
- Less commonly used equipment should be kept in storage.
- Do not store chemical containers on the floor.
- Do not store excess cardboard boxes, equipment boxes, Styrofoam, etc. under lab benches, on shelves, or above shelves/cabinets throughout the lab. This can be a safety as well as a fire hazard.

4.4 Compressed Gases

Hazards of compressed gases

Compressed gases are hazardous due to the high pressure inside cylinders. Knocking over an unsecured, uncapped cylinder of compressed gas can break the cylinder valve; the resulting rapid escape of high-pressure gas can turn a cylinder into an uncontrolled rocket or pinwheel, causing serious injury and damage. Poorly controlled release of compressed gas in the laboratory can burst reaction vessels, cause leaks in equipment and hoses or result in runaway chemical reactions. Compressed gases may also have flammable, oxidizing, dangerously reactive, corrosive or toxic properties. Inert gases such as nitrogen, argon, helium and neon can displace air, reducing oxygen levels in poorly ventilated areas and causing asphyxiation.

Safe handling, storage and transport of compressed gas cylinders:

- All gas cylinders, full or empty, should be securely supported using suitable racks, straps, chains or stands.
- When cylinders are not in use or are being transported, remove the regulator and attach the protective cap.
- An appropriate cylinder cart should be used for transporting cylinders. Chain or strap the cylinder to the cart.

- Verify that the regulator is appropriate for the gas being used and the pressure being delivered. Do not rely upon the pressure gauge to indicate the maximum pressure ratings; check the regulator's specifications.
- Do not use adaptors or adhesive tape to attach regulators to gas cylinders.
- Never bleed a cylinder completely empty; leave a residual pressure.
- Do not lubricate the high-pressure side of an oxygen regulator.
- Do not expose cylinders to temperature extremes.
- Store incompatible classes of gases separately.

4.5 Guidance on providing appropriate and suitable PPE

In Section 3.2 of this guide the OHS Act Section 8. 2. (b) requirements and Hierarchy of Controls was discussed and it was clearly stated that PPE should be the last resort when developing hazard controls.

However, it is also a fact that in many cases the exposure to the potential consequences of hazardous exposure cannot be totally controlled by applying the first four steps of the Control Hierarchy and therefore PPE should be used to supplement or augment other means of hazard control, to further minimise the risk of injury.

Issues affecting use of PPE include discomfort and inconvenience, and unsuitable or poorly maintained equipment. It is vital that problems caused by inadequate selection, fit and maintenance do not undermine the effectiveness of the equipment. This requires careful consideration of PPE requirements w.r.t suitability, quality, comfort of the wearer, management's commitment and willingness to enforce the use of PPE, etc.

Establishing an effective PPE program is in itself an extensive subject and it is not the intention to discuss it in any great detail in this guide. Instead a very brief summary of the key requirements for PPE in a materials testing laboratory is provided below and it is highly recommended that the laboratory management consider establishing a formal PPE standard to at least ensure compliance with regulatory requirements.

Determining the need for PPE

The first step in the process is to determine the need for and the type of PPE required to protect workers from the residual risk of a particular hazard. This is done as part of the workplace Hazard Analysis and should be documented in the hazard register under Mitigating Controls.

Types of personal protective equipment

PPE is generally grouped in the following categories, with examples, based on the type of protection afforded by the equipment:

- Respiratory protection - disposable, cartridge, air-line, half or full face;
- Eye protection – spectacles/goggles, shields, visors;
- Hearing protection – ear muffs and plugs;
- Hand protection – gloves and barrier creams;
- Foot protection – shoes/boots;
- Head protection – helmets, caps, hoods, hats;
- Working from heights – harness and fall arrest devices;
- Skin protection – hats, sunburn cream, long sleeved clothes.

Selecting the most appropriate and suitable PPE

Determining the most appropriate and suitable item of PPE for a particular application requires very careful consideration. In practice it is often found that the PPE used in the workplace is not effective simply because the selection process is flawed and by and large the decisions are often based on "convenience" and "cost saving" considerations to the detriment of the persons whom are supposed to be protected.

Typical examples of incorrect selection or application of PPE are:

- Using a standard “dust mask” to protect against inhalation of toxic chemical vapours or using a filter type face mask with the incorrect filter;
- A very common PPE mistake in a Lab is the reliance on latex for all purpose use. Latex gloves do not provide adequate chemical protection from organics, solvents, toxics, acids, or bases. The best choice for all purpose use is nitrile gloves;
- Regular glasses are not safety glasses. Safety glasses must be worn over prescription glasses;
- Using common ear plugs when ear muffs are required for noise protection. Hearing Protection Devices have different ratings based on the level of protection required (The measured noise level) and the employees’ Personal Attenuation Rating (PAR). It is sometimes necessary to wear a combination of hearing protectors for adequate protection.

Above examples are but a few of the common misconceptions and mistakes associated with application of PPE and, if you are not certain of the most suitable item to select, the appropriate course of action should be to consult with a reputable PPE supplier for the correct selection and application based on your risk assessments.

General laboratory dress code

It is recommended that laboratory managers establish a standard dress code that should apply to all Lab employees and visitors whilst present on laboratory premises. This dress code is the minimum requirement over and above the prescribed PPE that may be required for specific tasks. As a minimum the following items of clothing and protection is recommended:

- **Clothing:** Long pants or skirts and closed toed shoes, and tie back long hair (hair nets). Shorts, short skirts, sandals, loose clothing, or dangling jewellery should not be allowed.
- **Laboratory coat:** All laboratory workers and visitors should wear fully buttoned laboratory coats at all experimental areas where hazardous materials are handled. It is recommended that laboratory coats made from 100% cotton and which cover the arms are used..
- **Eye protection and gloves:** It is recommended that laboratory personnel and visitors either wear, or have readily available (in the laboratory coat pocket), suitable safety glasses and gloves.

5. MATERIALS TESTING LABORATORY SPECIFIC HAZARDS

This section provides examples of typical hazards that are likely to be encountered in a materials testing laboratory included in the scope of this guide. It is by no means suggested that the list is complete; however, it does represent an illustration of information acquired through visits to relevant laboratories as well as information received from representatives of materials testing laboratories and reliable sources on the Internet.

The aim of this section is to provide information that will assist laboratory managers with hazard identification and defining potential effects. It is highly recommended that laboratories compile a similar lab-specific list to facilitate the Hazard Identification process within own operations. The information is presented in Table 2 below:

Table 2 - Examples of typical Hazards, Potential Consequences and Recommended Control Measures

Notes:

¹ Minimum Regulatory requirements and Generic Controls for Laboratory Hazards are not included in the column for Recommended Controls. Refer to Section 4: General Considerations for control of Laboratory Hazards

HAZARD GROUP	HAZARD DESCRIPTION / SOURCE	POTENTIAL CONSEQUENCES	RECOMMENDED CONTROLS ¹
Hot Fluids	Liquid Bitumen ± 210°C/Paddle Tip Blender	Severe burns to body when handling sample containers.	Wear appropriate PPE to protect against very high temperatures. Refer to Section 3 for PPE requirements.
Hazardous Chemical Agents: Toxic Liquids Flammable Liquids Toxic Gases Flammable Gases Compressed gas	Trichloroethylene/Rotary Evaporator	Suspected human carcinogen: The International Agency for Research on Cancer classify Trichloroethylene as a human carcinogen. Exposure to very high concentrations of Trichloroethylene can cause dizziness, headaches, sleepiness, incoordination, confusion, nausea, unconsciousness, and even death. May cause irritation to Skin and Eyes.	Consider eliminating the hazard by changing to a more viable and safer alternative to Trichloroethylene. Research conducted in the USA suggests that such alternatives are available. Loss of Containment is the Top Event (initiating event) for all incidents associated with hazards involving liquids. Control measures for these hazards should therefore focus on preventing Loss of Containment and promptly dealing with leaks and spillages to prevent an escalation of consequences.
Toluene/Distillation unit, Centrifuge and Bulk storage (200ℓ drums)	Highly flammable. A vapour mixture within the flammable range will easily ignite if a source of ignition is present. Causes skin irritation. May cause drowsiness or dizziness. May cause damage to organs (central nervous system, liver, heart) through prolonged or repeated exposure.		
10% Methane, Balance Gas Argon (P-10) used in XRF spectroscopy.	Extremely flammable and asphyxiant gas mixture. Can ignite if an external source of ignition is present. Exposure to very high concentrations could lead to unconsciousness and even death in unventilated areas.		
	Hydrogen/Gas Chromatograph and storage cylinder	Highly flammable. Loss of containment (gas leak) from tubing or valve could result in ignition/fire and severe burns to persons in close proximity.	Follow the rules of safe handling and storage of compressed gases in Section 4.4 of this guide and ensure that regular leak tests are performed on connections, hoses, and hose fittings. Emergency response should include elimination of ignition sources in the immediate proximity.

HAZARD GROUP	HAZARD DESCRIPTION / SOURCE	POTENTIAL CONSEQUENCES	RECOMMENDED CONTROLS ¹
Pressure Hazards	High pressure equipment 2.10 MPa - Pressure Aging Vessel/ /Compressed Dry Air	Air supply hose failure or “over-pressure situation” in apparatus and supply cylinder, could cause injury to Lab employees, emergency responders, etc.	Ensure that built-in “over-pressure” (fail safe) mechanisms are properly maintained and, if possible, are periodically tested for proper operation.
Dynamic Situation Hazards	Personnel moving at same level (Slips, Trips and Falls). Caused by cluttered passageways, differences in floor height, slippery floors, etc.	Slips, trips & falls make up majority of general industry incidents. The most common injuries reported are; <ul style="list-style-type: none"> - Head hip and pelvis injuries - Sprains & strains - Bruises & contusions - Fractures - Abrasions & lacerations 	Refer to Section 3 for Housekeeping requirements.
Hot Surfaces	Vacuum Degassing Oven/ ± 170°C and Heating ovens/± 110°C - 170°C	Burns when lifting the extremely hot lid by hand. Burns when handling sample containers inside ovens.	Refer to Section 3 for PPE requirements.
Electricity	Low Voltage (LV) >30 -750V Electricity supply to lab equipment	Injuries including electrical shock, burns, and falls due to electrical shocks and burns. Sparks from electrical equipment can ignite flammable materials. Too much current flowing through a wire can cause a power cord to overheat and start a fire.	It is highly recommended that an Energy Isolation Procedure, that includes isolation of electrically operated equipment, is established. A policy of “inspect before use” should also be in place for all portable electrical equipment.
Electromagnetic Radiation	Exposure to microwaves (high frequency radio waves) leaking from conventional microwave ovens used in lab tests.	Long exposures to very high levels of microwave energy can be absorbed by the body and produce heat in exposed tissues, resulting in severe tissue damage.	It is recommended that the condition of seals around microwave oven doors are inspected at least monthly and that the oven is periodically checked for radiation leaks.

HAZARD GROUP	HAZARD DESCRIPTION / SOURCE	POTENTIAL CONSEQUENCES	RECOMMENDED CONTROLS ¹
Ionizing Radiation	Exposure to X-Rays (<i>Radiation scatter</i>) from hand-held XRF Units	All radiation, if received in sufficient quantities, can damage living tissue. Exposure to unacceptable high dosage of radiation may result in acute or chronic effects that can ultimately be fatal.	Ensure that XRF unit operators are adequately trained and that an operator's manual and/or training manual is conveniently available to ensure continued safe operation. Where high frequency use of XRF equipment is the order of the day it is recommended that operators wear an appropriate personal dosimeter to monitor exposure. Monitoring radiation exposure with dosimeters provides an indication of the working habits and working conditions of the XRF user and may be a way to identify whether the XRF analyzer is being properly used.
Asphyxiants	Helium gas (He) used in XRF spectroscopy. An inert gas and displaces air. It can be an asphyxiant when inhaled instead of normal air.	Exposure to an Oxygen depleted /deficient atmosphere (<19%) resulting from leakage of compressed gases or spillage of volatile liquids. Even situations with slight oxygen deficiencies (at or below 19 % of oxygen concentrations) may cause a momentary loss of coordination.	Ensure that and signs of gas leakage and spillage of volatile or toxic liquids are dealt with immediately and that the workplace is properly ventilated to ensure prompt dissipation of vapour. Regularly perform leak tests on gas lines and connections. With regards to ventilation, ensure that the provisions of the Environmental Regulations for Workplaces, 1987 and the requirements of SANS 10400-O:2011 Edition 3 Part O: Lighting and ventilation, are adhered to and installations are properly maintained.
Toxic Solids: Silica, crystalline	Respirable crystalline silica dust - exposure above the recommended limit (<i>TWA OEL-RL</i>) $0.1\text{mg}/\text{m}^3$ during geotechnical lab tests.	Inhaling respirable crystalline silica over long periods can cause silicosis, a debilitating and potentially fatal lung disease.	Where local exhaust ventilation is impractical or not completely effective technicians should wear suitable breathing apparatus (face mask) with an appropriate filter when handling samples.
Corrosive Substances	Contact with corrosive liquids used in Lab tests and cleansing of apparatus (Sulfuric/ Hydrochloric/Nitric Acid)	Chemical burns to Hands, Eyes, Face and other exposed Skin areas.	Refer to Section 3 for PPE requirements.
Ergonomic Hazards	Ergonomic stressors in the laboratory include static and/or awkward postures and repetitive movement. Manual handling, workplace design and poor body positioning are other potential issues. These stressors occur when using hoods, microscopes, when pipetting, poor seating arrangements, using computers, etc.	Typical common repetitive strain injuries include Carpal Tunnel Syndrome, Raynaud's Syndrome ("white finger"), Trigger Finger, Tendinitis, etc. Lower back problems can result from continuous and long-term awkward posture.	Refer to Section 3 for minimum Regulatory requirements.

HAZARD GROUP	HAZARD DESCRIPTION / SOURCE	POTENTIAL CONSEQUENCES	RECOMMENDED CONTROLS ¹
Physical Agents: Noise Heat Stress	Noise ≥85dBA - Intermittent Noise/ Continuous Noise/Impulsive Noise from various items of Lab equipment Human body temperature >37°C - Heat radiation from lab equipment (could be up to 1100°C), combined with very hot ambient temperatures, in poorly ventilated or confined areas.	Exposure above the limit can lead to Noise Induced Hearing Loss. Dehydration of the body which can, in extreme cases, lead to heat exhaustion.	Refer to Section 3 for Regulatory and PPE requirements. Refer to Section 3 for Regulatory requirements. Heat stress is one of the hazards that should be addressed in an organisations Health Risk Assessment and it is a minimum requirement that a Registered Occupational Hygiene practitioner must assist with an evaluation of the workplace where heat stress has been identified as a hazard. This issue seems to be specifically prevalent in remote laboratories where proper design specifications are not followed. Refer to the provisions of the Environmental Regulations for Workplaces, 1987 and the requirements of SANS 10400-O:2011 Edition 3 Part O: Lighting and ventilation for the minimum specifications for facilities which, due to conditions of high temperature, may be dangerous to safety or health.
Environmental Aspects: Surface Water, Soil and Groundwater, Hazardous Waste	Liquid and Solid hazardous waste generated from lab processes eg. Toluene, Trichloroethylene, Methanol, etc. and contaminated gloves, paper towels, rags, vermiculite or “kitty litter” used to clean up chemical spills, etc.	Improper disposal could result in: - Bodily injury and health risks to ignorant and innocent 3 rd parties - Environmental pollution - Severe reputational damage - Liability claims	Refer to Section 3 for general chemicals handling requirements.

REFERENCES

1. Occupational Health and Safety Act, Act No. 85 of 1993 as amended and various relevant Regulations made under the Act;
2. National Environmental Management: Waste Act, 2008 (Act No. 59 Of 2008) - Waste Classification and Management Regulations, 2013;
3. Hazardous area classification and Laboratory operations, Health and Safety Executive, United Kingdom;
4. Evaluation of an alternative solvent for extraction of asphalt to reduce health hazards - A report published by the Florida Department of Transportation, USA, December 2000
5. Hazardous Chemicals Handbook, Second edition by Phillip Carson PhD MSc AMCT CChem FRSC FIOSH Head of Science Support Services, Unilever Research Laboratory, Port Sunlight, UK and Clive Mumford BSc PhD DSc CEng MIChemE, Consultant Chemical Engineer;
6. Globally Harmonized System of Classification and Labelling of Chemicals (GHS), Seventh revised edition, United Nations, 2017;
7. A guide to the safe handling of solvents in a Bitumen/Asphalt Materials Laboratory. Originally prepared for SABITA by the CSIR under Project 59E2084 and revised by SABITA May 2010;
8. Washington State Department of Transportation, Materials Laboratory Environmental Health & Safety Manual, M 46-04, 2011;
9. User Manual Delta™ Family: Handheld XRF Analyzers, Innov-X Systems, Inc., 2010;
10. Laboratory Safety Manual, The University of Texas At Austin Environmental Health and Safety, December 2017;
11. Guidance on the safe use of handheld XRF analysers, The Society for Radiological Protection, September 2012;
12. X-Ray Radiation Safety, Manual for Operator Training, Bruker Elemental Hand-held XRF Analyzers, 030.0011.01.0;
13. Laboratory Safety Guidance, Occupational Safety and Health Administration, U.S. Department of Labor, OSHA 3404-11R, 2011;
14. Code of Good Laboratory Working Standards, University of York, UK, 2019
15. Health and Safety in Chemical Industries, a pamphlet published by the Department of Labour, South Africa (Undated);
16. Laboratory Safety Manual, McGill University, Montreal, Quebec, Canada as updated February 2, 2017;

ANNEXURES

1. Laboratory Health and Safety Policy and Commitment
2. Example of a qualitative Risk Assessment Matrix
3. Example Hazard Register
4. Example of a Hazards Control Sheet

[Logo]

LABORATORY HEALTH SAFETY and ENVIRONMENTAL POLICY

XYZ HSE Aspirations

XYZ aspires to achieve an HSE performance that is exemplary in its field of expertise and which is consistently equal to, or better than the performance of competitors engaged in corresponding activities.

XYZ Commitment to HSE

XYZ is committed to:

- *pursue the goal of no harm to people, which includes the local communities*
- *protecting the environment*
- *use energy resources and materials efficiently to provide products and services*
- *manage HSE matters with the diligence accorded to any of its other critical business activities*
- *play a leading role in promoting best practice in our industry*
- *promote a culture in which all XYZ employees share this commitment*
- *transparency in the reporting of our HSE performance*

In this way, we aim to have an HSE performance we can be proud of, be a good neighbour and, earn the confidence of customers, business partners and the society at large.

XYZ HSE Policy

XYZ shall:

- *have a systematic approach to HSE management designed to ensure compliance with the RSA Laws and Regulations and relevant local and international industry standards*
- *conduct activities in a manner designed to minimise HSE risks to a level which is As Low as Reasonably Practicable (ALARP)*
- *set targets for continuous HSE performance improvements*
- *measure, appraise and report performance as required by interested parties*
- *hold appropriately empowered line management staff accountable for HSE performance*
- *empower all our employees to refrain from actions that are considered a threat to HSE*
- *require contractors to manage HSE in line with this policy*

XYZ will implement this policy through a documented Risk Management Plan in respect of, every risk identified for all aspects of work in our operations, and be subjected to periodic audits to verify compliance.

This HSE Policy was approved on the [...] day of [...] 20.. by:

J Doe
Laboratory Manager, XYZ

Annexure 2 - Example Qualitative Risk Assessment Matrix

SEVERITY	CONSEQUENCES				INCREASING LIKELIHOOD				
	PEOPLE	ASSETS	ENVIRONMENT	REPUTATION	A	B	C	D	E
					Never heard of in Industry	Heard of in Industry	Has occurred more than once per year in Industry	Has occurred at least once in our Company	Has occurred more than once per year in our Company
0	No health effect	No damage	No effect	No impact					
1	Slight health effect	Slight damage	Slight effect	Slight impact					
2	Minor health effect	Minor damage	Minor effect	Minor impact					
3	Major health effect	Moderate damage	Moderate effect	Moderate impact					
4	Permanent Total Disability	Major damage	Major effect	Major impact					
5	1 or more fatalities	Massive damage	Massive effect	Massive impact					

Annexure 3 - Example Hazard Register

Hazard No	Activity/Location	Hazard/Top Event	Threats	Controls	Potential Consequences considered for RAM rating	Worst Case Inherent Risk Potential				Administrative controls required to demonstrate compliance or achievement of ALARP
						P	A	E	R	
						3E				
HSE/01	<p>Activity: Handling hazardous chemicals during testing procedures</p> <p>Location: ABC test room using CCB test apparatus</p>	<p>Hazard: Toxic and corrosive liquids -</p> <p>Top Event: (1) Loss of containment; (2) Exposure to toxic vapours (Inhalation)</p>	<ul style="list-style-type: none"> Workers not aware of or ignore the hazards; Containers left open after decanting; Slippery glass container drops and breaks Vapour in the breathing zone of worker; Workers handle liquid with unprotected hands; 	<ul style="list-style-type: none"> Hazard communication: Ensure workers are fully aware of the hazards associated with the substances they use (SDS for products must be available in the relevant workplace) Substitute hazardous liquids with less hazardous products; Keep containers closed when not in use; Where compatible, use plastic or metal containers to store hazardous liquids Provide adequate ventilation (a constant flow of air) to extract or diffuse any toxic vapours in a work area; PPE - Wear suitable breathing apparatus and chemical resistant gloves when handling toxic and corrosive substance; 	Contact with corrosive liquid Major health effect - Lab technicians sustain serious burns to hands, arms and face	<p>Comments: A similar incident recently occurred in our company</p>				<p>Hazard Control Sheet</p> <p>Site MERP</p> <p>Product SDS's</p> <p>Workplace inspections and reports</p> <p>Employee training records</p>

Annexure 4 - Example Hazard Control Sheet

Cautionary note: This sheet contains information resulting from a GENERIC Risk Analysis of the activity under assessment. Users shall exercise caution and conduct further task specific Hazard Analysis to ensure that ALL potential Hazards and Threats are identified and appropriately assessed.

HAZARD Control SHEET No: HCS/01/2018		Page 1 of 2								
Hazard Group: Toxic and corrosive liquids		Location: Materials Testing Laboratory								
Assessment of hazard										
Top event/s: (1) Loss of containment; (2) Exposure to toxic vapours (Inhalation)										
Potential Consequence/s: (1) Contact with corrosive liquid: Major health effect - Lab technicians sustain serious burns to hands, arms and face (2)										
Risk ranking (Worst case scenario):		<table border="1"> <tr> <td style="background-color: yellow;">P</td> <td style="background-color: yellow;">3</td> <td style="background-color: yellow;">E</td> </tr> </table>	P	3	E					
P	3	E								
Threats: Workers not aware of or ignore the hazards; Hazardous liquid spills in work area; Vapour in the breathing zone of worker; Workers handle liquid with unprotected hands;										
Controls:										
1.1 Control in design		HSE Critical Task								
<ul style="list-style-type: none"> ❖ Hazard Communication Standard ❖ Adequate exhaust ventilation installed ❖ Emergency shower and eye wash facility installed in close proximity to where incidents are likely to occur 		<table border="1"> <tr> <td>General HSE induction</td> <td>Lab manager</td> </tr> <tr> <td>Approved standard</td> <td>Engineering Contractor</td> </tr> <tr> <td>Facility designed to approved standard and appropriately placed</td> <td>Lab manager/Consultant</td> </tr> </table>	General HSE induction	Lab manager	Approved standard	Engineering Contractor	Facility designed to approved standard and appropriately placed	Lab manager/Consultant		
General HSE induction	Lab manager									
Approved standard	Engineering Contractor									
Facility designed to approved standard and appropriately placed	Lab manager/Consultant									
1.2 Control in operation		Responsible Position								
<ul style="list-style-type: none"> ❖ Hazard communication: Workers are fully aware of the hazards associated with the substances they use - (SDS for products are available in the relevant workplace) ❖ Exhaust ventilation activated before commencement of task ❖ Handle containers with suitable slip resistant gloves ❖ PPE - Wear suitable breathing apparatus, chemical resistant gloves, eye and face protection when handling toxic and corrosive substance - Refer to PPE standard 		<table border="1"> <tr> <td>Workplace induction and on-the-job training</td> <td>Lab supervisors</td> </tr> <tr> <td>Follow approved task procedure</td> <td>Lab technician</td> </tr> <tr> <td>Follow approved task procedure</td> <td>Lab technician</td> </tr> <tr> <td>Inspect PPE before use</td> <td>Lab technician</td> </tr> </table>	Workplace induction and on-the-job training	Lab supervisors	Follow approved task procedure	Lab technician	Follow approved task procedure	Lab technician	Inspect PPE before use	Lab technician
Workplace induction and on-the-job training	Lab supervisors									
Follow approved task procedure	Lab technician									
Follow approved task procedure	Lab technician									
Inspect PPE before use	Lab technician									
1.3 Control in maintenance										
<ul style="list-style-type: none"> ❖ Routine inspection and maintenance of ventilation systems and emergency shower and eye wash facility ❖ ❖ ❖ ❖ 		<table border="1"> <tr> <td>Planned maintenance schedule</td> <td>Lab maintenance technician</td> </tr> </table>	Planned maintenance schedule	Lab maintenance technician						
Planned maintenance schedule	Lab maintenance technician									
1.4 Recovery measures										
<ul style="list-style-type: none"> ❖ Emergency shower and eye wash facility accessible and operational ❖ Medical emergency reaction plan - 1st Aid kits and trained responders available 		<table border="1"> <tr> <td>Regular inspections to ensure integrity of equipment</td> <td>Lab technicians/H&S Reps</td> </tr> <tr> <td>Inspections to ensure of 1st Aid box is stocked as required</td> <td>1st Aid responders/H&S Reps</td> </tr> </table>	Regular inspections to ensure integrity of equipment	Lab technicians/H&S Reps	Inspections to ensure of 1 st Aid box is stocked as required	1 st Aid responders/H&S Reps				
Regular inspections to ensure integrity of equipment	Lab technicians/H&S Reps									
Inspections to ensure of 1 st Aid box is stocked as required	1 st Aid responders/H&S Reps									
References										
Legislation: Hazardous Chemical Substances Regulations, 1995; General Safety Regulations, 1986 (Minimum contents of a first aid box)										
Industry Standards: (Example, SANS Standards and other relevant standards for ventilation systems and emergency shower and eye wash facilities)										
Revision: Original										

Determination of ALARP

ADDITIONAL RISK REDUCTION MEASURES FOR CONSIDERATION	IS THE MEASURE CREDIBLE / PRACTICABLE? (Yes / No)	ARE DISPROPORTIONATE RESOURCES REQUIRED TO IMPLEMENT? (Yes / No)
1.		
2.		
3.		
4.		
5.		

Is the Risk ALARP? – Y/N

Comments:

1.

METHOD USED (X)	TEAM MEMBERS	
Experience/Judgment Cost-Benefit Quantitative Assessment Other	Expertise	Name
	HSE:	
	Engineering:	
	Operations:	
	Other:	

Management approval

I approve that the barriers listed above manage the risk to ALARP; and (where necessary) additional actions have been identified and included in the Remedial Action Plan.

Sign:

Designation:

Date: